

# Merge Practice

Practice resolving **conflicts** in git.

# Merging Branches


A common git activity. 2 cases:

1. merge two different named branches

e.g. merge a feature branch into **master**

2. merge a local and "remote tracking" branch,

e.g. **master** (local) and **origin/master** (tracking)

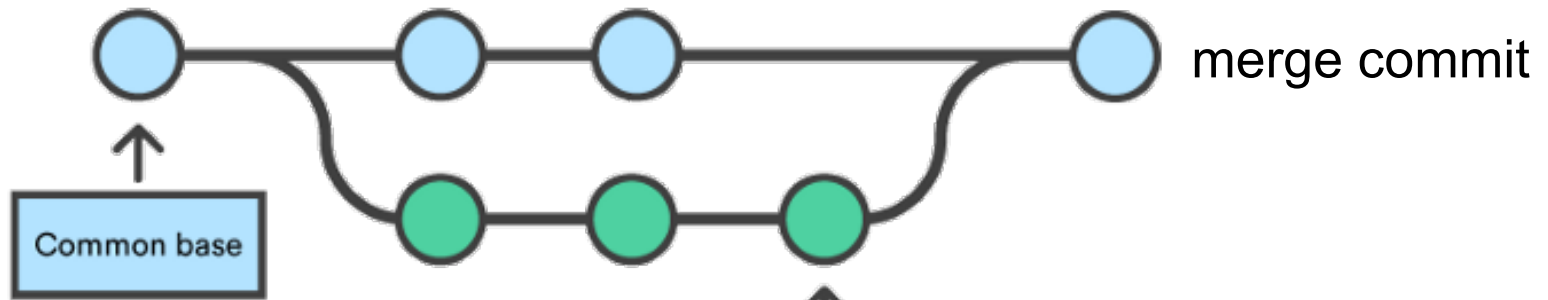

# Exercise

We will deliberately create a **conflict** by editing the README.md in two copies of same repo:


1. **Github** using Github's online editor
2. **Your local repo** using any editor

Then **discover** the differences and **resolve them**.

# 1. Make a change on Github

Use your **git-commands** repo on **Github**

1. On **Github**, edit README.md using Github's online editor.



Add these three lines at the top:

```
# The Ultimate Guide to Using Git  
  
***For The Impatient.***
```

2. Write a **descriptive commit message** and **Commit** the change (green **Commit** button).

## 2. Make a different change in your local repo

1. In your **local git-commands repo**, edit `README.md` (in your *working copy*)

Add this title at the top of file:

```
# Quick Guide to Git
```

```
By Your Name
```

2. Make some other change in `README.md` (*anything*).

3. Commit the changes to your **local** repo.

```
git add -u
```

```
git commit -m "Add a title to README"
```

# 3. Check Status

`git status`

It should return:

What is **origin/master** ???  
*Where* is it ???

On branch master

**Your branch is ahead of 'origin/master' by  
1 commit.**



(use "git push" to publish your local commits)  
nothing to commit, working tree clean

'origin/master' is a short form for 'remotes/origin/master'

## 4. What did I change?

You can compare all the changes between your local "master" branch and the tracking branch "origin/master".

Syntax: `git diff commit1 commit2`

where `commit1` & `commit2` refer to any commits.

```
> git diff master origin/master
```

- It should show what you changed locally.
- Does `diff` show the title line you added on Github?

# 5. push your work

Since your local copy is *ahead* of origin/master, **push it**.

```
> git push
```

What happens?

```
Remote repository contains work that you do not  
have! [rejected] master -> master (fetch  
first)
```

```
error: failed to push some refs to  
'https://github.com/...'
```

```
hint: Updates were rejected because the remote  
contains work that you do not have locally.
```



# *This is Good!*

This is actually a **good thing**.

Git won't let you accidentally **overwrite** work that someone else has added to the repository.

Git forces you to **merge** the differences first.

# What Went Wrong?

"git status" and "git diff" use only files in your **local repo**.

They do not send a request over the network to the remote.

Try this:

```
> git remote show origin
```

Does it tell you anything useful???

# git remote show origin

This command uses the network to check status of "origin".

```
> git remote show origin
```

```
* remote origin
```

```
Fetch URL: https://github.com/youracct/...
```

```
Push URL: https://github.com/youracct/...
```

```
HEAD branch: master
```

```
Remote branch:
```

```
  master tracked
```

```
Local branch configured for 'git pull':
```

```
  master merges with remote master
```

```
Local ref configured for 'git push':
```

```
  master pushes to master (local out of  
date)
```

## 6. What has changed on "origin"?

*Let's see what has changed on "origin"...*

Update your "tracking branch" for **origin/master**:

```
git fetch
```

*This **fetches** the latest revisions from the remote origin into your tracking branch (**origin/master**) but does **not** merge them into your local branch (**master**).*

*It does not change your working copy either.*

# 7. compare branches (again)

Show a graph of all branches, including tracking branches:

```
gitk --all
```

View the differences between all files in a terminal window:

```
git diff master origin/master
```

Does "git diff" show the differences in the title line now?

# Where did "fetch" put the updates?

"`git fetch`" downloads changes from `origin` (Github).

**Where** did git save these updates?

In your working copy

In the `master` branch

In the `origin/master` tracking branch

# "diff" format

diff is a standard command that shows differences in a **standard** format. It can be used to create patches, too!

```
diff --git a/README.md b/README.md
index 21b69e8..09b0702 100644
--- a/README.md    ('a' = local version)
+++ b/README.md    ('b' = remote version)
@@ -1,6 +1,6 @@
-# Quick Guide to Git
+# The Ultimate Guide to Using Git

-By Harry Hacker
+***For the impatient.***
```

# 8. merge the two versions

Use "git merge" to automatically merge branches.

```
cmd> git merge --no-commit
```

```
Auto-merging README.md
```

```
CONFLICT (content): Merge conflict in  
README.md
```

```
Automatic merge failed; fix conflicts and  
then commit the result.
```

**--no-commit** gives you a chance to review the results, even if automatic merge succeeds.



# 9. Edit and fix conflicts

Use an editor to examine the result of all files that contain conflicts.

Part(s) containing a **conflict** will look like this:

```
<<<<<<<<<< HEAD
```

```
The text from your local repository
```

```
=====
```

```
Conflicting text from the remote version
```

```
>>>>>>>>> refs/remotes/origin/master
```

**Note: Auto-merge may create bugs by *successfully* merging parts of code that are incompatible! Always test code after merge.**



# 10. Mark Conflict as Resolved

Use "git status" to see that there is a conflict

```
cmd> git status
```

```
Unmerged paths:
```

```
(use "git add <file>..." to mark resolution)
```

```
both modified:   README.md
```

When you are satisfied that file is fixed, then...

```
cmd> git add README.md
```

```
cmd> git commit
```

```
(You should write a good commit message  
explaining the merge.)
```

```
cmd> git push
```

# I Give Up!

If the merge creates too many conflicts to fix, you can "undo" the merge and try something else.

```
cmd> git merge --abort
```

# Graphical Merge Tools

Graphical tools show the differences side-by-side.

1. IDE visual merge feature
2. Graphical mergetool (enter: `git help mergetool`).
3. Merge on Github
  - ok if there are no conflicts (e.g. fast-forward merge)
  - for conflicts, merge on your own computer so you can **run tests** before committing.

# End Notes

Optional material you can ignore.

# Understanding diffs

"**diff**" is a Unix command to show differences between text files. It shows:

- lines **changed** (differences)
- lines **added** in one file
- lines **deleted** in one file

diff may show surrounding identical lines for **context**, to make it easier to identify the "diff" in code.

Example: make 2 copies of a text file. Change one copy (add lines, change lines, delete lines). Run diff:

```
cmd> diff a.txt b.txt
```

# Diffs on Github

(Demo in class.)

Click on "[commits](#)" link on a repository.

Find an interesting commit and click the hash (6b57...)

**finished money class**



**jbrucker** committed 13 days ago ✓



6b576fc



Github shows changes from previous commit.



# "git pull" = "git fetch" + "git merge"

"git pull" performs two commands:

**git fetch** - fetch updates from a remote repository.

It saves the remote in a separate branch named:

`origin/master` or `origin/branchname`

**git merge** - merge two development histories.

If you don't specify which branches to merge,

the default is HEAD and `origin/tracking_branch_name`

# git fetch and diff

It is safer to use "git fetch" instead of "git pull"

1. fetch the remote branch: `git fetch`
2. in your local repo, the branch you just fetched is named `origin/master` or `origin/branch-name`
3. view differences between working copy and remote:  
`git diff origin/master`  
`== or ==`
4. view differences between local HEAD and remote:  
`git diff HEAD origin/master`

# Visual Merge Tools

You can use a **graphical diff viewer** to both view and resolve differences. It is easier to comprehend.


**meld** and **diffuse** are good tools known by git.

```
cmd> git help mergetool
```

I use **meld** or **diffuse**. Example:

```
cmd> git mergetool --tool=meld
```

```
cmd> git mergetool --tool=meld
```

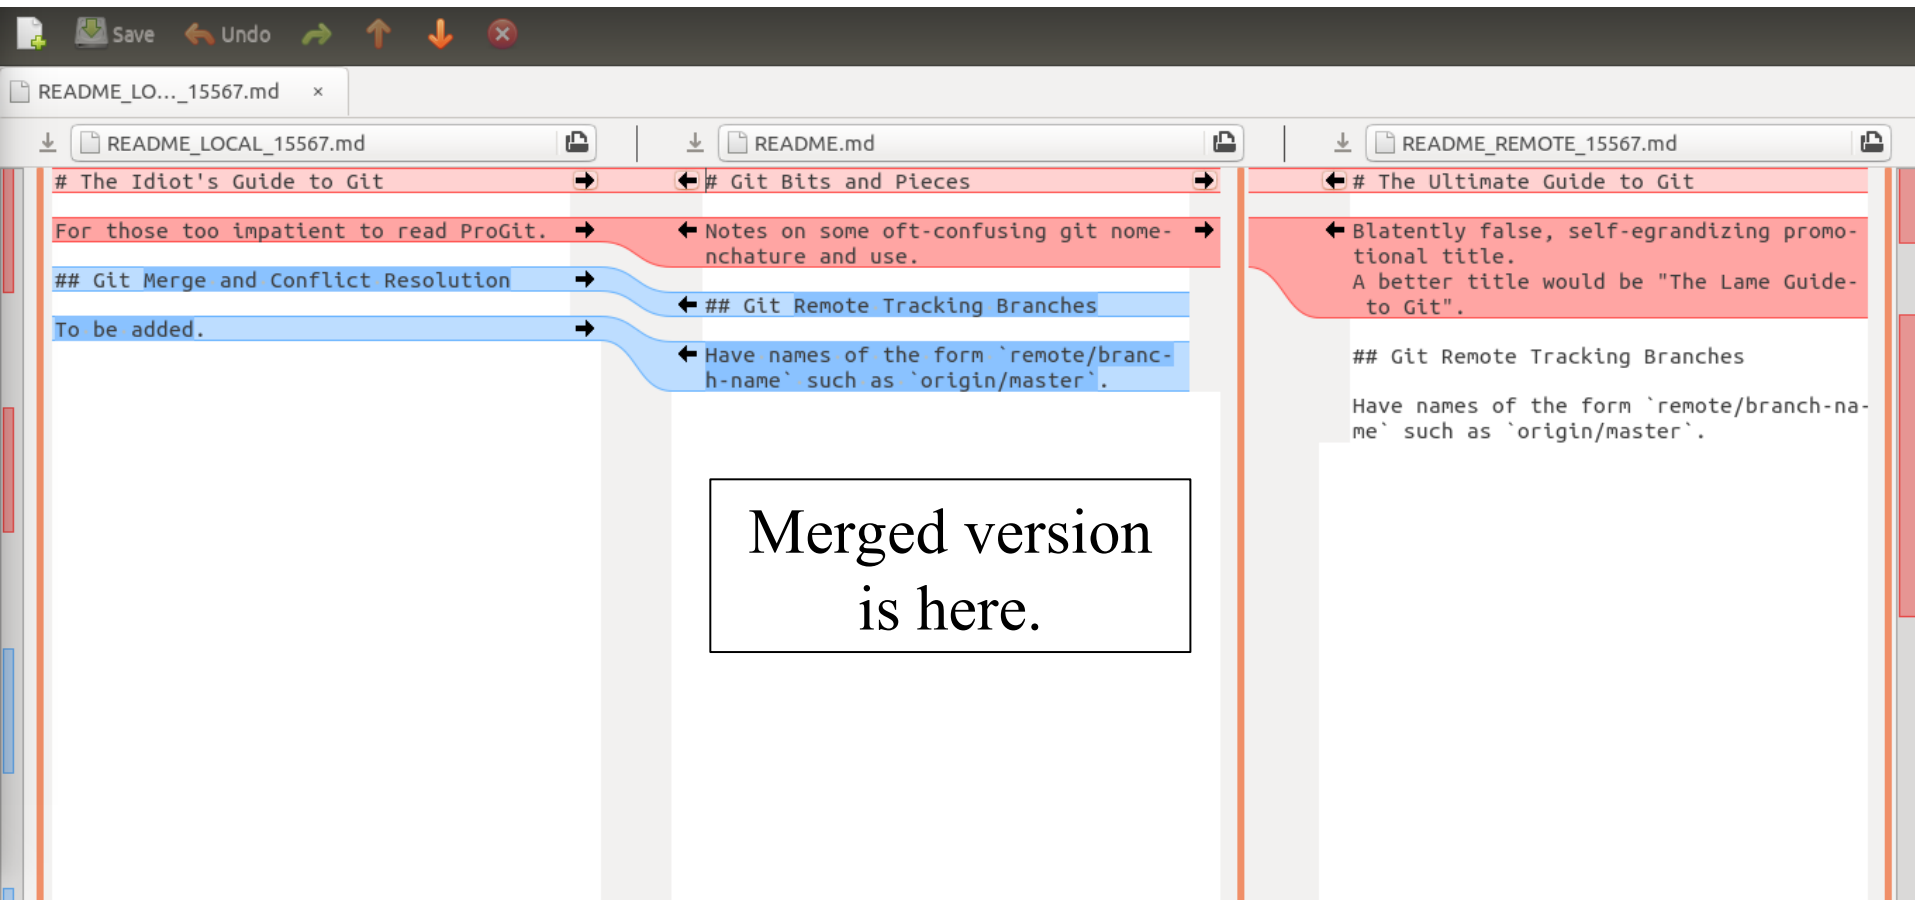

# Common Cause of Conflicts

1. **Developer A clones** a repo from Github, or "**pulls**" latest rev from Github. Now he is up to date!
2. **Developer A** starts work on his local copy.
3. **Developer B pushes** a change to some files in the **same repo** to Github.
4. **Developer A** commits his work and does "**git push**".

**What Happens?**

# What Happens?

```
dev-A> git commit -m "add tests for ..."
```

```
dev-A> git push
```

! [rejected] master -> master (fetch first)

error: failed to push some refs to https://github.com/...

hint: Updates were rejected because the remote contains work that you do not have locally. This is usually caused by another repository pushing to the same ref.

You may want to first integrate the remote changes (e.g., 'git pull ...') before pushing again.